

T 8046-2 EN

Type 3246-1 and Type 3246-7 Pneumatic Control Valves

Type 3246 Globe Valve

With long insulating section and circulation inhibitor

Class 600 and 900/PN 100 and 160



Application

Globe valve for cryogenic applications

Valve size	NPS ½ to 8 · DN 15 to 200
Pressure rating	Class 600 and 900 · PN 100 and 160
Temperatures	-325 to +149 °F · -196 to +65 °C

Special features

Type 3246 Globe Valve operated with

- Type 3271 Pneumatic Actuator (Type 3246-1 Control Valve)
- Type 3277 Pneumatic Actuator (Type 3246-7 Control Valve) for integral positioner attachment

Valve body made of

- Cast stainless steel

Low-noise valve plug

- Metal seal
- High-performance metal seal

Optional with RFID tags with unique identification according to DIN SPEC 91406.

The control valves with their modular design can be equipped with various accessories:

Positioners, limit switches, solenoid valves and other accessories according to IEC 60534-6 ¹⁾ and NAMUR recommendation (see Information Sheet ▶ T 8350 for more details).

Version

Standard version with double PTFE packing, long insulating section and circulation inhibitor · Valve size NPS ½ to 8 (DN 15 to 200) · Class 600 and 900 (PN 100 and 160) · Flanges or welding ends

- **Type 3246-1** (Fig. 1) · With Type 3271 Actuator with 350 to 2800 cm² actuator area (see Data Sheets ▶ T 8310-1, ▶ T 8310-2 and ▶ T 8310-3)
- **Type 3246-7** · With Type 3277 Actuator with 175v2 to 750v2 cm² actuator area (see Data Sheet ▶ T 8310-1)

Further versions

- **Type 3246-1 or Type 3246-7 Globe Valve** · With long insulating section and circulation inhibitor, NPS ½ to 10 (DN 15 to 250), Class 150 and 300 (PN 16 and 40) · See Data Sheet ▶ T 8046-1

¹⁾ Accessories required. See associated actuator documentation.

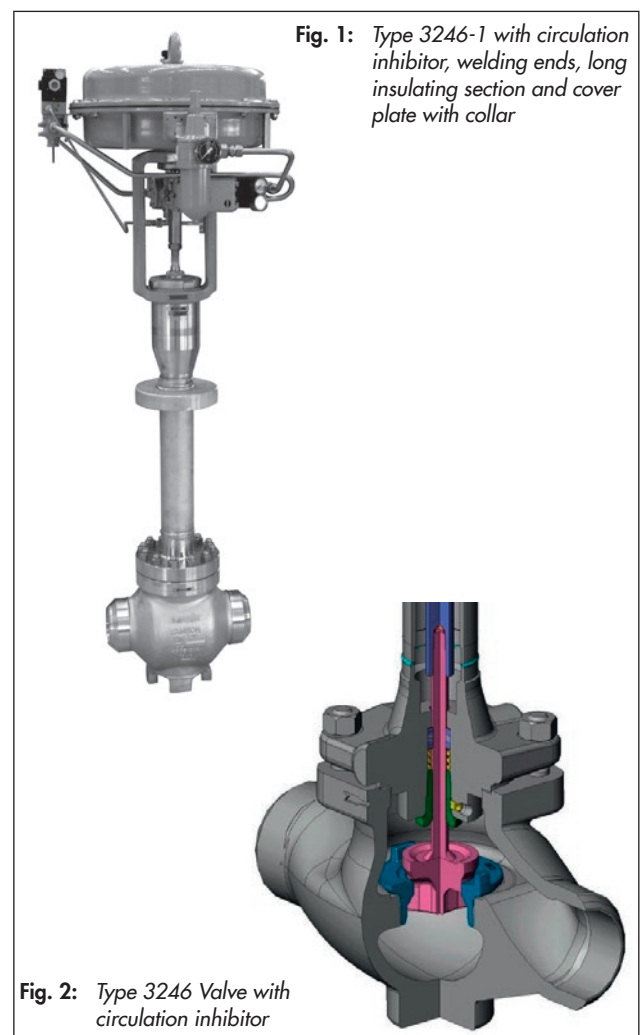


Fig. 2: Type 3246 Valve with circulation inhibitor

- **Type 3246-1 or Type 3246-7 Three-way Valve** · With long insulating section and circulation inhibitor, NPS ½ to 6 (DN 15 to 150), Class 150 and 300 (PN 16 and 40) · See Data Sheet ▶ T 8046-3
- **Perforated plug** · See ▶ T 8086

Principle of operation

The medium flows in the flow-to-open direction through the valve. The valve plug determines the cross-sectional area of flow. The circulation inhibitor at the bottom minimizes the effects of the medium flow in the insulating section.



Fail-safe position

Depending on how the springs are arranged in the pneumatic actuator (see Data Sheets ▶ T 8310-1, ▶ T 8310-2 and ▶ T 8310-3), the valve has two different fail-safe positions that become effective when the supply air fails.

- **Actuator stem extends (fail-close):** The valve closes when the supply air fails.
- **Actuator stem retracts (fail-open):** The valve opens when the supply air fails.

Differential pressures

Permissible differential pressures are listed in Information Sheet ▶ T 8000-4

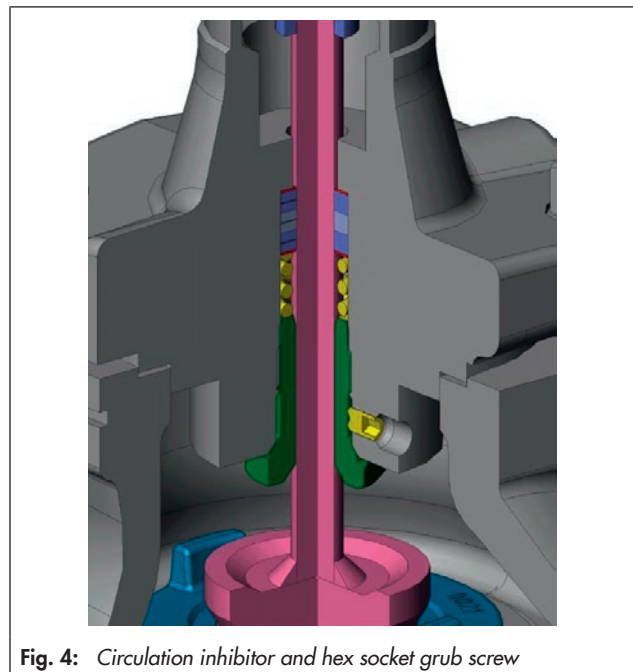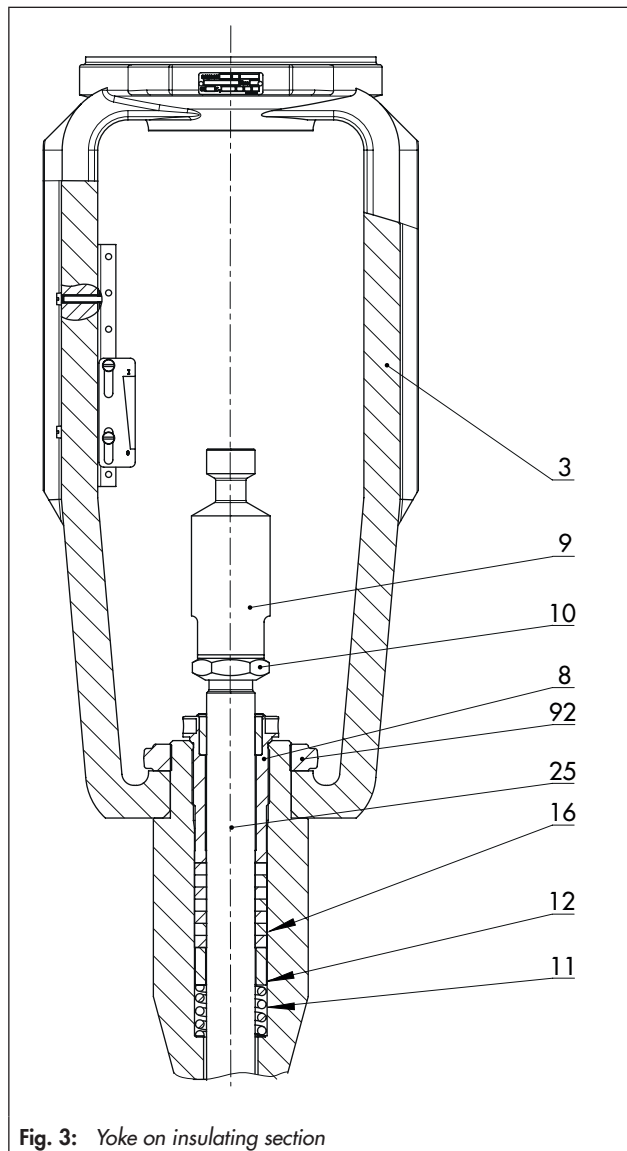

Legend for Fig. 3

3	Yoke		
8	Threaded bushing		
9	Stem connector nut		
10	Lock nut		
11	Spring		
12	Washer		
16	Packing		
25	Plug stem extension		
92	Castellated nut		

Table 1: Technical data for Type 3246 Globe Valve with circulation inhibitor

Material		Cast stainless steel A351 CF8/1.4308
Valve size		NPS ½ to 8 · DN 15 to 200
Pressure rating		Class 600 and 900 · PN 100 and 160
Type of connection	ANSI	Flanges with raised face · Welding ends
	DIN	Flanges form B1 · Welding ends
Seat-plug seal		Metal seal · High-performance metal seal · Stellite®
Characteristic		Equal percentage · Linear · On/off
Rangeability		50:1
RFID tag (optional)		Application range acc. to the technical specifications and explosion protection certificates. Documents ► www.samsongroup.com > Service & Support > Electronic nameplate
Conformity		CE · EAC
Temperature ranges in °C (°F) · Permissible operating pressures according to pressure-temperature diagrams (see Information Sheet ► T 8000-2)		
Valve with PTFE packing		-196 to +65 °C (-325 to +149 °F)
RFID tag (optional)		Max. permissible operating temperature: 85 °C (185 °F)
Leakage class according to ANSI/FCI 70-2 or IEC 60534-4		
Valve plug	Metal seal	IV
	High-performance metal seal	V

Table 2: Materials

Standard version Body and flanges		Cast stainless steel A351 CF8/1.4308
Seat and plug ¹⁾	Metal seal	CrNi steel
Guide bushings		CrNi steel
Packing	Self-adjusting	V-ring packing: PTFE with carbon · Spring: 1.4310
Circulation inhibitor	NPS ½ to 6 (DN 15 to 150)	PTFE with silk cord, spring-loaded · Bushing 2.4360 (Monel®)
	NPS 8 (DN 200)	PTFE with silk cord, spring-loaded · Bushing 2.0402 (CuZn40Pb2)
Body gasket		Serrated gasket with graphite facing
Insulating section		A351 CF8/A182 F304 1.4308/1.4301

¹⁾ Seats and metal-seated plug also with Stellite® facing or plug made of solid Stellite® available

Table 3: C_v and K_{vs} coefficients
Table 3.1: Overview

C_v	0.12	0.2	0.3	0.5	0.75	1.2	2	3	5	7.5	12	20	30	47	75	120	190	290	420	735	
K_{vs}	0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10	16	25	40	63	100	160	250	360	630	
Seat ØD mm	6						12			24			31	38	50	63	80	100	125	150	200
Rated travel	mm						15						30						60		
	in						0.5						1.18						2.36		

Table 3.2: Versions

C_v	0.12	0.2	0.3	0.5	0.75	1.2	2	3	5	7.5	12	20	30	47	75	120	190	290	420	735
K_{vs}	0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10	16	25	40	63	100	160	250	360	630
NPS	DN																			
½	15	•	•	•	•	•	•	•	•	•										
¾	20	•	•	•	•	•	•	•	•	•	•									
1	25	•	•	•	•	•	•	•	•	•	•									
1½	40	•	•	•	•	•	•	•	•	•	•	•								
2	50								•	•	•	•	•							
3	80								•	•	•	•	•	•	•					
4	100												•	•	•	•	•			
6	150														•	•	•	•	•	
8	200																•	•	•	•

Table 4: Dimensions for Type 3246-1 and Type 3246-7 Control Valves with long insulating section and circulation inhibitor**Table 4.1:** Type 3246 with welding ends and cover plate with collar

Valve		NPS	½	¾	1	1½	2	3	4	6	8	
		DN	15	20	25	40	50	80	100	150	200	
Length L	Class 600/ PN 100	in	8.00	8.25	8.25	9.88	11.25	13.25	15.50	20.00	24.00	
		mm	203	206	210	251	286	337	394	508	610	
	Class 900/ PN 160	in	8.50	9.00	10.00	12.00	14.50	15.00	18.00	24.00	29.00	
		mm	216	229	254	305	368	381	457	610	737	
H4	Class 600 and 900/ PN 100 and 160	in	24				27			33		
		mm	610				686			838		
H5	Class 600 and 900/ PN 100 and 160	in	31.89			31.93	34.92	35.16	44.92	44.92		
		mm	810			811	887	893	1141	1141		
H8 ¹⁾ (actuator area)	Class 600 and 900/ PN 100 and 160	in	9.45			16.46	16.46		19.80			
		mm	240 (175v2 to 750v2 cm ²)			418 (1000 to 1400-60 cm ²)		503 (1400-120 to 2800 cm ²)				
Cover plate	Ød	in	5.98					7.99	10.00			
		mm	152					203	254			
	h	in	1.57									
		mm	40									

¹⁾ Type 3246-7: H8 + 100 mm


Table 4.2: Types 3271 and 3277 Pneumatic Actuators

Actuator area		cm ²	120	175v2	240	350	355v2	700	750v2	1000	1400-60	1400-120	2800
Diaphragm ØD	in	6.61	8.46	9.45	11.02	11.02	15.35	15.51	18.19	20.87	21.02	30.32	
	mm	168	215	240	280	280	390	394	462	530	534	770	
H ¹⁾	in	2.71	3.07	2.44	3.23	4.76	7.83	9.29	15.87	13.27	23.54	28.07	
	mm	69	78	62	82	121	199	236	403	337	598	713	
H3 ²⁾	in	4.33	4.33	4.33	4.33	4.33	7.48	7.48	24.02	24.02	25.59	25.59	
	mm	110	110	110	110	110	190	190	610	610	650	650	
H5	Type 3277	in	3.46	3.98	3.98	3.98	3.98	3.98	3.98	–	–	–	–
	Type 3277	mm	88	101	101	101	101	101	101	–	–	–	–
Thread	Type 3271	M30x1.5 M60x1.5									M100x2		
	Type 3277	M30x1.5							–	–	–	–	
α	Type 3271	G ⅛ (⅛ NPT)	G ¼ (¼ NPT)	G ¼ (¼ NPT)	G ⅜ (⅜ NPT)	G ⅜ (⅜ NPT)	G ⅜ (⅜ NPT)	G ⅜ (⅜ NPT)	G ¾ (¾ NPT)	G ¾ (¾ NPT)	G 1 (1 NPT)	G 1 (1 NPT)	
α2	Type 3277	–	G ⅜	G ⅜	G ⅜	G ⅜	G ⅜	G ⅜	–	–	–	–	

¹⁾ Height including lifting eyelet or female thread and eyebolt according to DIN 580. Height of the swivel hoist may differ. Actuators up to 355v2 cm² without lifting eyelet or female thread

²⁾ Minimum clearance required to remove the actuator

Dimensional drawing

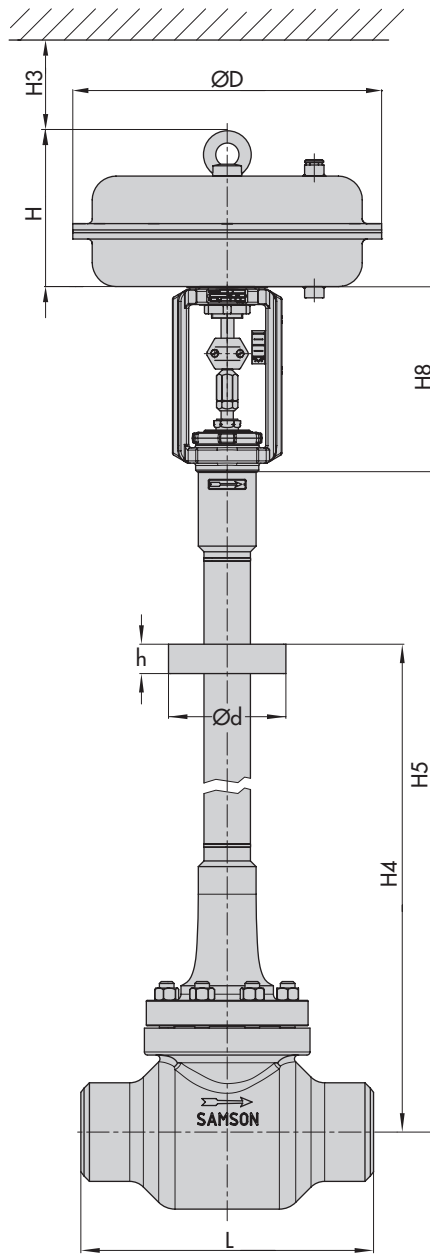

Version with welding ends

Table 5: Weights for Type 3246-1 and Type 3246-7 Control Valves with long insulating section and circulation inhibitor

Table 5.1: Type 3246 Valve

Valve		NPS	½	¾	1	1 ½	2	3	4	6	8
		DN	15	20	25	40	50	80	100	150	200
Weight, approx.	Class 600/ PN 100	lbs	55	57	60	66	170	234	313	624	1102
		kg	25	26	27	30	77	106	142	283	500
	Class 900/ PN 160	lbs	71	75	77	93	212	284	351	730	On request
		kg	32	34	35	42	96	129	159	331	

Table 5.2: Types 3271 and 3277 Pneumatic Actuators

Actuator area		cm ²	175v2	240	350	355v2	700	750v2	1000	1400-60	1400-120	2800
Weight	Type 3271	lbs	13	11	18	33	49	79	176	154	385.5	992
		kg	6	5	8	15	22	36	80	70	175	450
	Type 3277	lbs	22	20	26	42	57	88	-			
		kg	10	9	12	19	26	40	-			

Table 6: Valve/actuator assignment

Valve size		Stem diameter	Actuator
NPS	DN		
½ to 1½	15 to 40	0.63 in (16 mm)	175v2 to 750v2 cm ²
2 to 4	50 to 100	0.98 in (25 mm)	350 to 2800 cm ²
6	150	1.58 in (40 mm)	700 to 2800 cm ²
8	200	1.58 in (40 mm)	1000 to 2800 cm ²

Selection and sizing of the control valve

1. Calculate the C_v (K_v) coefficient according to IEC 60534.
2. Select the valve size and C_v (K_{vs}) coefficient from Table 3.
3. Determine the permissible differential pressure Δp from the Information Sheet ▶ T 8000-4
4. Select the trim material from Table 2
5. Select the type of end connection, seat/plug seal and characteristic from Table 1

Order specifications:

Valve size	NPS .../DN ...
Pressure rating	Class 600 or 900/PN 100 or 160
Type of connection	Flanges or welding ends
Plug	Metal seal or high-performance metal seal
Characteristic	Equal percentage, linear or on/off
Actuator	Type 3271 or Type 3277 (▶ T 8310-1, ▶ T 8310-2 or ▶ T 8310-3)
Fail-safe position	Fail-close or fail-open
Process medium	...
Density	kg/m ³ or lb/ft ³
Temperature	°C or °F
Flow rate	lbs/h or kg/h or cu.ft/min or m ³ /h in standard or operating state
Pressure	p_1 and p_2 in bar (psi) (absolute pressure p_{abs}) (with minimum, normal and maximum flow rate)
RFID tag	Yes/No
Valve accessories	Positioner and/or limit switch

Note: The temperature limits for DIN and ANSI versions are not directly converted temperatures.